

dimax


CABLE CONTRA INCENDIO
16AWG X 2C - LSZH

T010

- Conductor:
16AWG: Class 1 solid Copper
- Insulation:
HDPE (High-Density Polyethylene o Polietileno de Alta Densidad)
- Core Identification:
2 cores: RED BLACK
- Rip Cord
Polyester Fibers
- Outer Sheath
LSZH
Sheath Colour: Red RAL3020
- Voltage Rating Uo/U:
300/300V
- Temperature Rating:
-20°C to +75°C
- Minimum Bending Radius:
15 x overall diameter
- Fire Power Limited Cable:
Type FPLR
- UL1424



16AWG X 2C - LSZH - UL

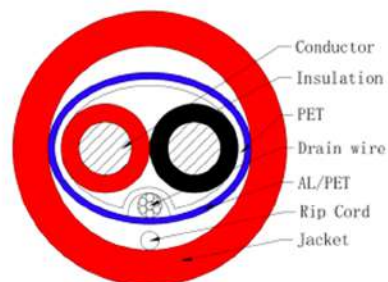

Specification (AWG)	Jacket OD (mm)	Conductor DCR 20°C Ohms/km
2x16 UNSHLD	4.75	13.5